


Image not found or type unknown

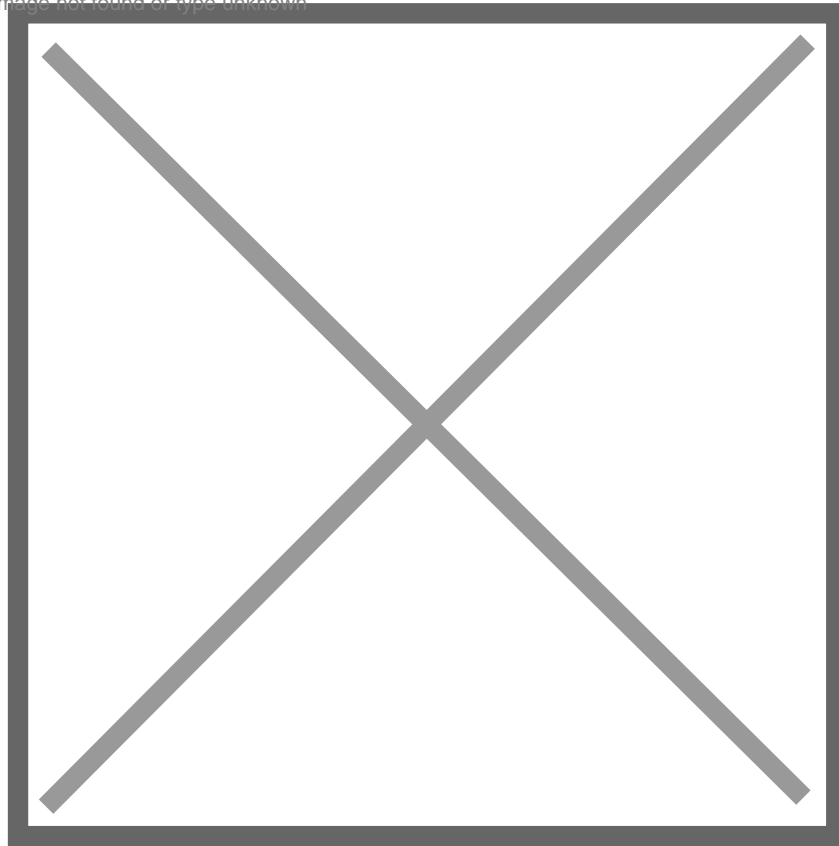

UNBALANCED SEAL - CS220M

Face Materials

- carbon, ceramic, tungsten carbide, Silicon carbide, Iecroly
- <https://www.cosmosseals.com/images/product-images/>

Metal Parts

- SS 316, SS 304

Secondary Seals

- PTFE, GFT

Applications

- petrochemicals, petroleum refineries, general chemicals, light hydrocarbons

Operating Limits

- Shaft Diameter d_1 - 125 - 100mm, Pressure P : 10 bar (max), temperature t : -60°C - +200 degree C, velocity v : 20m/sec